



Female connector  
with solder termination  
Contact spacing .098"

Directive 2002/95/EC  
"RoHS"  
Compliant

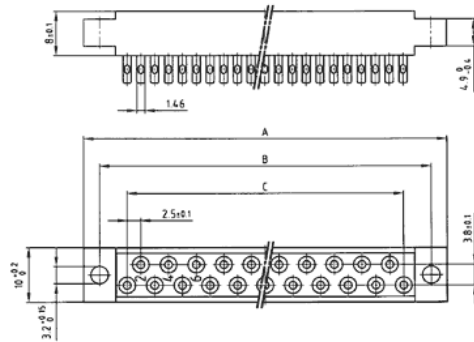

Panel cut out

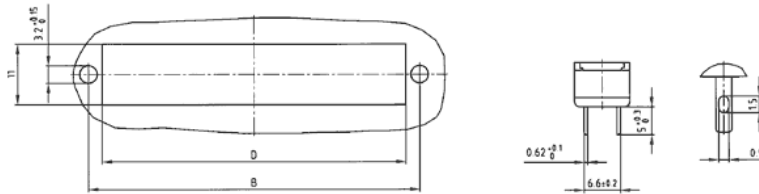

No. of Pos.	A -0.3	B ±0.1	C ±0.1
13	45,8	40,0	12 x 2,5 = 30
21	65,8	60,0	20 x 2,5 = 50
31	90,8	85,0	30 x 2,5 = 75

Part Numbers

No. of Pos.	hard-silver-plated	Quality class 3	Quality class 2	Quality class 1
13	102 E 10019 X	102 A 10019 X	102 B 10019 X	102 C 10019 X
21	102 E 10029 X	102 A 10029 X	102 B 10029 X	102 C 10029 X
31	102 E 10039 X	102 A 10039 X	102 B 10039 X	102 C 10039 X