Features

- Suitable for FOC and coaxial contacts acc. to DIN 41 626
- Using of guiding pins (male and female) is imperative (see chapter 40).

Contact arrangement

according to following matrix

Contacts	Male insert (M) 09 14 004 4501	Female insert (F) 09 14 004 4512
Coaxial contacts	09 14 000 62xx	09 14 000 61xx
F.O. contacts	20 10 xxx 421x	20 10 xxx 422x

Coaxial cables (group 2)

Wires	Shell ∅	Internal wire ∅	Attenuation db/100 m at		
	mm	mm	100 MHz	200 MHz	800 MHz
50 Ω					
RG 174 / U	2.5	0.48			84
RG 188 A / U	2.6	0.54	29	40	
RG 316 / U	2.5	0.54		40	
75 Ω					
RG 179 B / U	2.55	0.3		41	
RG 187 A / U	2.7	0.3		41	

Technical characteristics

Specifications	DIN EN 60 664-1 DIN EN 61 984
Approvals	UL, CSA

Inserts

Number of contacts	4
Insulation resistance	≥ 10^{10} Ω
Material	polycarbonate
Limiting temperatures	-40 °C ... +125 °C
Flammability acc. to UL 94	V 0
Mechanical working life	
- mating cycles	≥ 500

Contacts

Coaxial contacts

Material	copper alloy
Surface	
- hard-gold plated	demand level 2
Impedance	50 Ω / 75 Ω
Contact resistance	
- Internal wire	≤ 10 mΩ
- Outer conductor	≤ 3 mΩ
Rated current	1.5 A
Rated voltage	50 V

F.O. contacts

Fibre type	Glas fibre (GI)
Attenuation	< 1.5 dB

F.O. contacts

Fibre type	Polymer Optical Fibre (POF)
Attenuation	< 2.5 dB

Assembly instructions

Stripping description



Assembly details for coaxial contacts



Crimp barrel solder

Solder temperature	approx. 300 °C
Solder duration	approx. 2 s

Due to the closed entry design of female insert the upper part has to be removed by screw driver (7 mm) before extracting the contacts. In this case the module will be destroyed.

Courtesy of Steven Engineering, Inc.-230 Ryan Way, South San Francisco, CA 94080-6370-Main Office: (650) 588-9200-Outside Local Area: (800) 258-9200-www.stevenengineering.com

Number of contacts

4

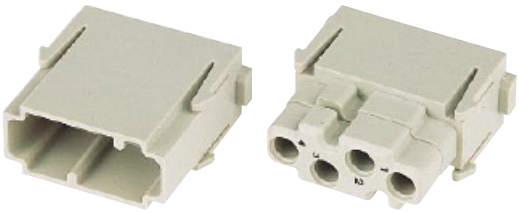

Identification	Part number Male insert (M)	Part number Female insert (F)	Drawing	Dimensions in mm
Multicontact module acc. to DIN 41 626 Order contacts separately	**09 14 004 4501**	**09 14 004 4512**	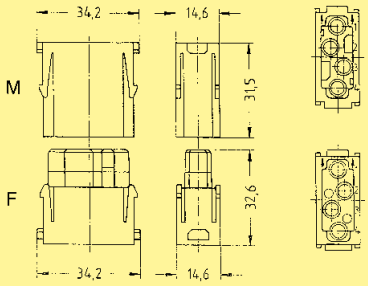 Contact arrangement view from termination side	

Identification	Impedance	Part number		Drawing	Dimensions in mm
Coaxial contacts acc. to DIN 41 626* Solder / crimp contact 	50 Ω 75 Ω	09 14 000 6211 09 14 000 6221	09 14 000 6111 09 14 000 6121	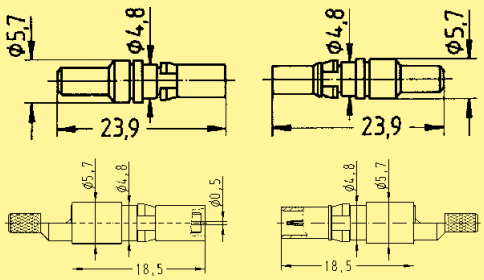 For cable group 2 flexible wires	
F.O. contacts acc. to DIN 41 626 for SI fibre (HCS®) 200/230 µm 		20 10 230 4211	20 10 230 4221		
for GI fibre 50/125 µm or 62.5/125 µm ceramic ferrule		20 10 125 4212	20 10 125 4222		
for 1 mm plastic fibre		20 10 001 4211	20 10 001 4221		

* Using of guiding pins is imperative (see chapter 40).

Stock items in bold type

Courtesy of Steven Engineering, Inc.-230 Ryan Way, South San Francisco, CA 94080-6370-Main Office: (650) 588-9200-Outside Local Area: (800) 258-9200-www.stevenengineering.com