




Main

Range of product	Lexium CAS
Product or component type	Cantilever axis
Product specific application	For 1 direction
Load position	On the 2 end blocks
Drive type	Toothed belt
Guide type	Ball

Complementary

Operating position	Vertical
Function available	Anti-static belt Different types of motor mounting Anti-corrosion version
Permanent permissible load	3 kg
Operating force	≤ 180 N for Z axis ≤ 210 N for Y axis ≤ 125 N for X axis
Maximum actuation speed	3 m/s
Acceleration	≤ 20 m/s ²
Torque value	≤ 7.8 N.m for Z axis ≤ 6.7 N.m for Y axis ≤ 5.1 N.m for X axis ≤ 1.5 N.m driving torque
Operating travel	8...200 mm
Repeat accuracy	+/- 0.05 mm
Mechanical service life	15000 km

Size Characteristics

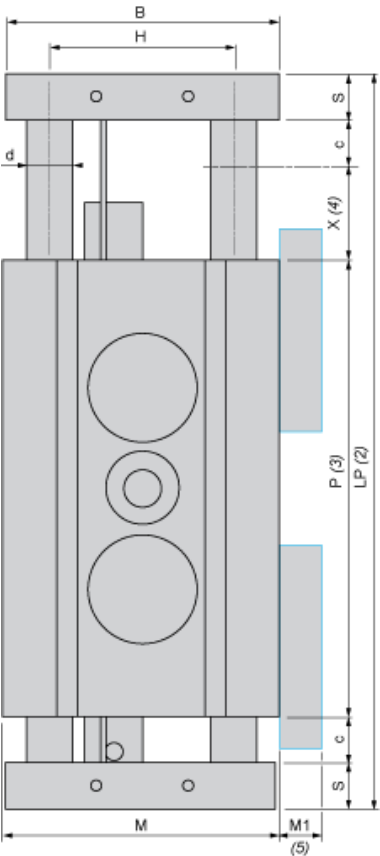


- (2) LP: total length of axis
(3) P: length of drive element
(4) X: stroke, depending on application
(5) Only for Lexium CAS 30 cantilever axes with sensors and CAS 31

B	mm	79
in.	3.11	
c	mm	10
in.	0.39	
d	mm	10
in.	0.39	
H	mm	56
in.	2.20	
LP	mm	= 150 + X
in.	= 5.90 + X	
M	mm	80
in.	3.15	
M1	mm	10
in.	0.39	
P	mm	100
in.	3.94	
S	mm	15


in.	0.59
-----	------

Forces and Torques Exerted on the Lexium CAS 3 Cantilever Axis




Type of Interface for the Drive Element

Drive Element Fixed on Right-Hand Side




Possible Motor Drive Configurations and Orientations


Motor only without Gearbox




Motor with Planetary Gearbox



Motor with Angular Planetary Gearbox



Planetary Gearbox only



Angular Planetary Gearbox only

