



GLO-RAY® MAX WATT DUAL INFRARED FOODWARMERS

Models GRAM-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D, -96D, -108D, -120D, -132D, -144D
GRAML-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D, -96D, -108D, -120D, -132D, -144D

Hatco Glo-Ray® Max Watt Dual Infrared Foodwarmers keep all hot foods at optimum serving temperatures longer. Foods do not dry out or become discolored; even the most delicate dishes hold that "just-prepared" look.

FLEXIBILITY

The Glo-Ray pre-focused heat pattern directs heat from a tubular element to bathe the entire holding surface. Units are available with shatter-resistant incandescent lights that illuminate the warming area.

Remote Control Enclosures are available, built in accordance with UL Standards to accommodate switches, indicator lights and wiring, ready for installation. **Remote Control Enclosure with toggle switch, Electronic Infinite Control, relay, and indicator light (in lieu of attached Control Enclosure) is recommended.**

A Control Enclosure may be specified in front or back of the unit to suit the location. All Glo-Ray models are shipped factory-assembled, with adjustable angle brackets (shipped loose), ready-to-install quickly and easily.


QUALITY

The following features assure the finest performance for years to come:


- Features 25% greater wattage output than Glo-Ray high watt by comparison with dual units varying in wattage from 900 to 8300 watts; and units with lights varying from 1020 to 9020 watts
- Available in widths from 18" to 12' (457-3658 mm).
- Sturdy extruded aluminum housings eliminate sagging.
- Pre-focused heat maintains serving temperatures longer without continuing to cook the food.
- Shatter-resistant incandescent lights (standard) enhance product display while safeguarding food products from bulb breakage. An optional halogen bulb may be used in lieu of incandescents.
- Available options include an Electronic Infinite Control with relay in a Remote Control Enclosure.
- Available in *Designer* colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, and Antique Copper
- Available in Gloss finishes: Smooth White, Gleaming Gold, Glossy Gray, Bold Black, Radiant Red, Brilliant Blue



Model GRAML-96D with Control Box (includes toggles) and optional non-adjustable tubular stands

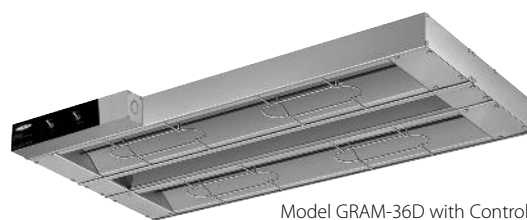

Model GRAM-36D with Control box (includes toggles) and 3" (76 mm) spacer

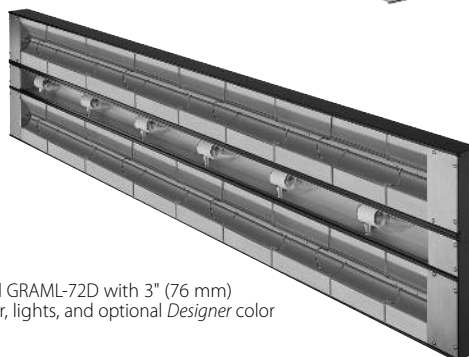

Model GRAML-72D with 3" (76 mm) spacer, lights, and optional *Designer* color



ANSI/NSF 4

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976
www.hatcocorp.com • E-mail: equipsales@hatcocorp.com

METAL SHEATHED ELEMENTS GUARANTEED AGAINST BURNOUT AND BREAKAGE FOR TWO YEARS.


Form No. GRAM-D Spec Sheet

Printed in U.S.A.
October 2011



GLO-RAY® MAX WATT DUAL INFRARED FOODWARMERS

Models GRAM-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D, -96D, -108D, -120D, -132D, -144D
GRAML-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D, -96D, -108D, -120D, -132D, -144D

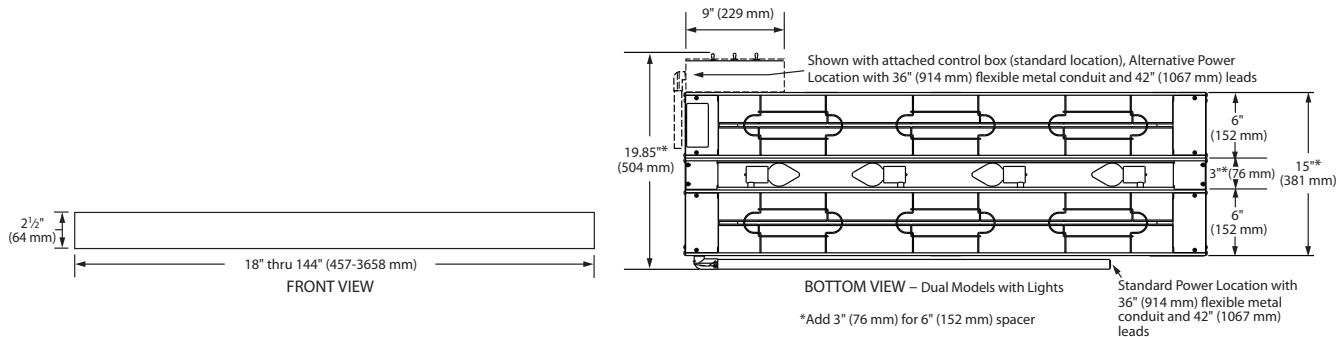

SPECIFICATION*

| Aluminum Max Watt | | Aluminum Max Watt with Lights | | | |
|-------------------|------|-------------------------------|------|----------------|-------------------------------|
| Model | Watt | Model | Watt | Width | Shipping Weight |
| GRAM-18D | 900 | GRAML-18D | 1020 | 18" (457 mm) | 14 lbs (6 kg)/14 lbs (6 kg) |
| GRAM-24D | 1300 | GRAML-24D | 1420 | 24" (610 mm) | 16 lbs (7 kg)/16 lbs (7 kg) |
| GRAM-30D | 1650 | GRAML-30D | 1770 | 30" (762 mm) | 18 lbs (8 kg)/19 lbs (9 kg) |
| GRAM-36D | 2000 | GRAML-36D | 2180 | 36" (914 mm) | 21 lbs (10 kg)/22 lbs (10 kg) |
| GRAM-42D | 2350 | GRAML-42D | 2530 | 42" (1067 mm) | 24 lbs (11 kg)/25 lbs (11 kg) |
| GRAM-48D | 2600 | GRAML-48D | 2840 | 48" (1219 mm) | 27 lbs (12 kg)/29 lbs (13 kg) |
| GRAM-54D | 3000 | GRAML-54D | 3240 | 54" (1372 mm) | 30 lbs (14 kg)/34 lbs (15 kg) |
| GRAM-60D | 3400 | GRAML-60D | 3700 | 60" (1524 mm) | 34 lbs (15 kg)/37 lbs (17 kg) |
| GRAM-66D | 3750 | GRAML-66D | 4050 | 66" (1676 mm) | 37 lbs (17 kg)/40 lbs (18 kg) |
| GRAM-72D | 4150 | GRAML-72D | 4510 | 72" (1829 mm) | 41 lbs (19 kg)/42 lbs (19 kg) |
| GRAM-84D | 4800 | GRAML-84D | 5220 | 84" (2134 mm) | 44 lbs (20 kg)/47 lbs (21 kg) |
| GRAM-96D | 5350 | GRAML-96D | 5830 | 96" (2438 mm) | 52 lbs (24 kg)/56 lbs (25 kg) |
| GRAM-108D* | 6000 | GRAML-108D* | 6540 | 108" (2743 mm) | 59 lbs (27 kg)/64 lbs (29 kg) |
| GRAM-120D* | 6800 | GRAML-120D* | 7400 | 120" (3048 mm) | 66 lbs (30 kg)/72 lbs (33 kg) |
| GRAM-132D* | 7500 | GRAML-132D* | 8160 | 132" (3353 mm) | 73 lbs (33 kg)/79 lbs (36 kg) |
| GRAM-144D* | 8300 | GRAML-144D* | 9020 | 144" (3658 mm) | 80 lbs (36 kg)/86 lbs (39 kg) |

- ✦ Includes either attached Control Enclosure or Remote Control Enclosure with toggle switch(es) and indicator light(s).
- ✧ Add 2-8 lbs. (1-3 kg) depending on RMB.
- ✨ 120 volt models available with RMB only.
- ✨ 120/208 and 120/240 volt models available with RMB only.
- ★ 1120 volt models not available.

DIMENSIONS

3" (76 mm) Spacer (Standard)

GRAM-D: 18" to 144"W x 15"D x 2 1/2"H (457-3658 x 381 x 64 mm).
GRAML-D: 18" to 144"W x 15"D x 2 1/2"H (457-3658 x 381 x 64 mm).

6" (152 mm) Spacer

GRAM-D: 18" to 144"W x 18"D x 2 1/2"H (457-3658 x 457 x 64 mm).
GRAML-D: 18" to 144"W x 18"D x 2 1/2"H (457-3658 x 457 x 64 mm).
For special widths, consult factory.

VOLTAGE

120, 208 and 240 volts, single phase. Models with Lights rated 120, 120/208 or 120/240 volts, single phase.

MOUNTING REQUIREMENTS

Recommended Mounting Height: 18"-24" (457-610 mm)

Adjustable Angle Brackets (Provides 1" – 2" (25-51 mm) clearance above Glo-Ray unit)

MINIMUM SPACING –

GLO-RAY MAX WATT DUAL FOODWARMERS MAY NOT BE INSTALLED IN COMBUSTIBLE SURROUNDINGS.

Non-Combustible Surfaces: Pass through area: 1" (25 mm) above, 15" (381 mm) to surface below. Corner mount: 3" (76 mm) from non-combustible back wall 15" (381 mm) to surface below.

OPTIONS (NOT FOR RETROFIT)

- ☐ Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper
- ☐ Gloss Finishes: Smooth White, Gleaming Gold, Glossy Gray, Bold Black, Radiant Red, Brilliant Blue
- ☐ Indicator Light
- ☐ Tandem Charge (Max. two elements end-to-end)
- ☐ Extended Electrical Leads
- ☐ Halogen Bulb in lieu of Standard Display Light
- ☐ Remote Control Enclosure with Toggle Switch, Electronic Infinite Control, Relay, and Indicator Light (In lieu of attached Control Enclosure)
- ☐ Non-Adjustable Tubular Stands 18", 20", 22, or 24" (457, 508, 559, or 610 mm) – Available in Designer colors or Gloss finishes
- ☐ Bright Annealed Reflector

PRODUCT SPECS

Infrared Foodwarmer

The Infrared Foodwarmer shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 parts and service assistance (U.S. and Canada only), the Foodwarmer shall be a Glo-Ray Model ... , rated at ... watts, ... volts, single phase and be ... millimeters in overall width.

The Glo-Ray shall consist of an aluminum housing and include as standard equipment adjustable angle brackets.

The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.