



HEAVY-DUTY 30.5 mm METAL PUSHBUTTONS

10250T Series
Starts at
\$24⁹⁰



- Heavy-Duty Zinc Die Cast Construction
- Enclosed Silver Contacts with Reliability Nibs
- Diaphragm Seals with Drainage Holes
- Grounding Nibs on Operator Casing

The 30.5 mm pushbutton line features a zinc die cast construction with chrome-plated housing and mounting nut. The same durable construction is also available with the corrosive resistant E34 Series of pushbuttons.


The contact blocks feature enclosed silver contacts with pointed “reliability nibs” for reliable performance from logic level up to 600V. To ensure reliable switching, nibs bite through oxide which can form on silver contacts, eliminating the need for expensive logic level blocks for most applications.

Reliability nibs improve performance in dry circuit, corrosive, fine dust and other contaminated atmospheres.

Under normal environmental conditions, the minimum operational voltage is 5V and the minimum operational current is 1 mA, AC/DC. For operation under a wider range of environmental conditions, logic level contact blocks with inert palladium tipped contacts are recommended.

10250T Series operators have “grounding nibs”—4 metal points on the operator casting designed to bite through most paints and other coatings on metal panels to enhance the ground connection when the operator is securely tightened.


Omega's pushbutton operators offer front of panel drainage via holes in the operator

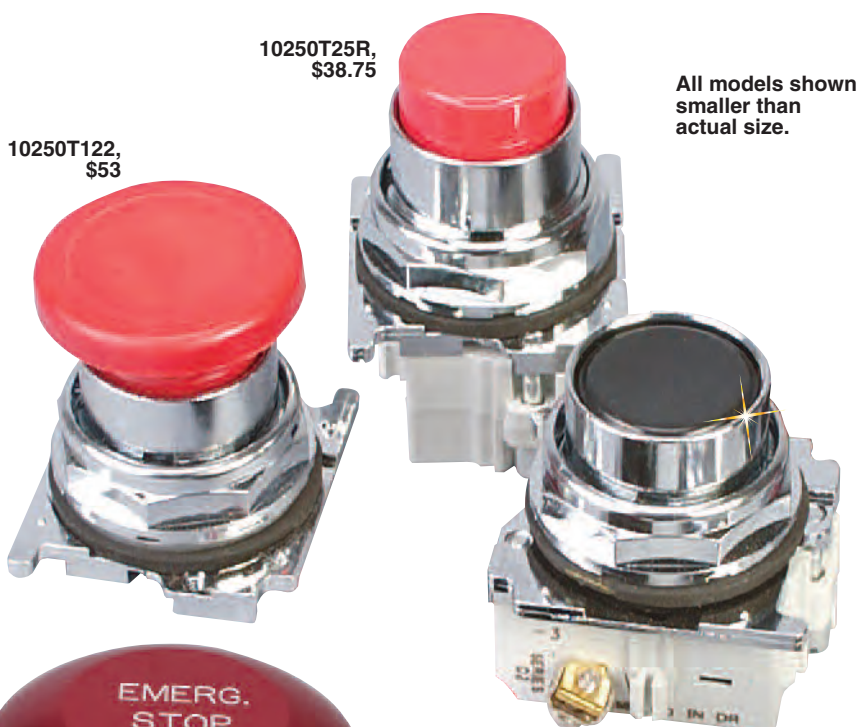

All models shown
smaller than
actual size.



10250T17213,
\$69.50

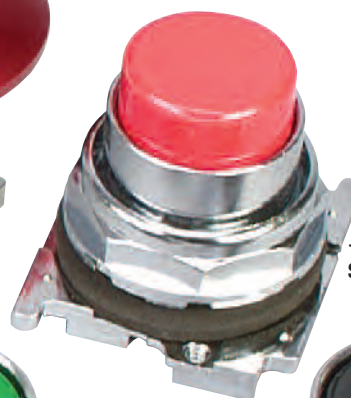

10250T112,
\$24.90



10250T103,
\$24.90



10250T101,
\$24.90

bushing. Hidden from view by the mounting nut, these holes prevent buildup of liquid inside the operator, which can prevent operation in freezing environments. The holes also provide a route for escaping liquid

in high pressure washdowns, effectively relieving pressure from the internal diaphragm seal. This ensures reliable sealing in applications even beyond NEMA 4.



SPECIFICATIONS

Standards and Certifications:

CE EN60947-5-1

UL 508: File No. 131568

CSA C22.2 No. 14: File No. LR68551

Ingress Protection (When Mounted in Similarly Rated Enclosure):

Standard Indicating Lights:

UL (NEMA) Type 1, 2, 3, 3R, 3S, 4, 4X, 12, 13; IEC IP65

All Other Operators: UL (NEMA)

Type 1, 2, 3, 3R, 4, 4X, 12, 13; IEC IP65

MECHANICAL RATINGS

Frequency of Operation:

All Pushbuttons: 6000 operations per hr

Key and Lever Selector Switches: 3000 operations per hr

Auto-Latch Devices: 1200 operations per hr

Life:

Pushbuttons: 10 x 106 operations

Contact Blocks: 10 x 106 operations

PresTest Units: 10 x 106 operations

Lever and Key Selector Switches: 0.25 x 106 operations

Twist-to-Release Pushbuttons: 0.3 x 106 operation

Shock Resistance Duration:

20 mS \geq 5g

Climate Conditions:

Operating Temperature: -17 to 66°C (1 to 150°F)

Storage Temperature: -40 to 80°C (-40 to 176°F)

Altitude: 2000 m (6562')

Max Humidity: 95% RH @ 60°C (140°F)

Terminals: Marking; NC-NO on the contact block to meet the NEMA requirements; dual marking system 1 to 2 for normally closed, 3 to 4 for normally open to meet BS5472 (Genelec EN50 005)

Clamps: Terminals are saddle clamp type for 1 x 22 AWG (0.34 mm²) to 2 x 14 AWG (2.5 mm²) conductors; torque = 7 lb-in (0.8 Nm)

Degree of Protection Against Direct Electrical Contact: IP2X with fingerproof shroud

Light Units: Transformers will withstand short circuit for 1 hr per IEC 60997-5-1

Average Bulb Life:

Transformer type: 20,000 hrs

Resistor/Direct Voltage Type: 2500 hr min @ rated V

LED: 60,000 to 100,000 hrs

Electrical Ratings

Insulation: UI = 660 Vac or Vdc

Thermal: I_{th} = 10 A

Short Circuit Coordination to

IEC/EN 60947-5-1:

Rated Conditional Short Circuit Current: 1 kA

Fuse Type: GE Power Controls TIA 10, Red Spot Type gG, 10 A, 660 Vac, 460 Vdc, BS88-2, IEC 60269-2-1

UL Rating: A600, P600

AC Load Life Duty Cycle: 1200 operations per hr

10A: 110V pf 0.4 – 1 x 106 operations

5A: 250V pf 0.4 – 1 x 106 operations

2A: 660V pf 0.4 – 1 x 106 operations

Switching Capacity:

AC15 Rated Make/Break

(11 x I_e at 1.1 x U_e):

6 A: 120V pf 0.3

4 A: 240V pf 0.3

2 A: 660V pf 0.3

DC13 Rated Make/Break

(1.1 x I_e at 1.1 x U_e):

1.0 A: 125V L/R \geq 0.95 @ 300 mS

0.55 A: 250V L/R \geq 0.95 @ 300 mS

0.1 A: 660V L/R \geq 0.95 @ 300 mS

10 A: 110V pure resistive

Maximum Ratings for Logic Level and Hostile Atmosphere Application:

Max Amperes: 0.5 A


Max Volts: 120 Vac/Vdc

Build Your Own System



10250T101, \$24.90

+



10250TM47, \$3.10

+



10250T2, \$27.50

Note: To order complete system add a contact block and legend plate to operator.


OR

Order Complete Devices and a Legend Plate



10250T29, \$85.50

+



10250TM47, \$3.10



10250T17213,
\$69.50



10250T172,
\$63




10250T411,
\$92



10250T112,
\$24.90



10250T101,
\$24.90



10250T103,
\$24.90



10250T122,
\$53



10250T63, \$75




All models shown
smaller than actual size.

10250T79, \$55




Dimensions: mm (in)

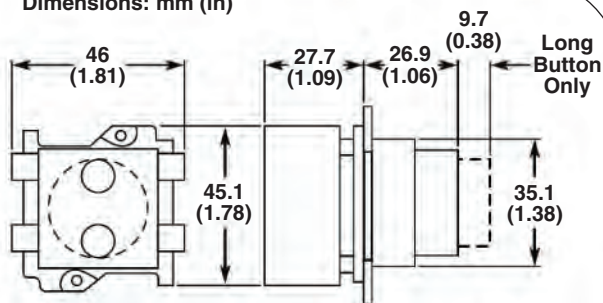

Flush and Long Pushbutton
Half Shroud is same as Long Pushbutton
with Lower Half of Guard Ring Cut Back

Dimensions: mm (in)

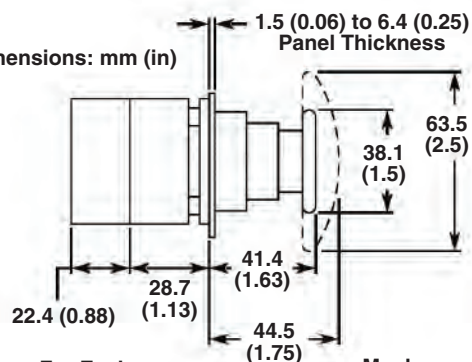

For Each
Additional
Contact Block

Mushroom and
Jumbo Head
Pushbutton

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
10250T MOMENTARY PUSHBUTTON OPERATORS		
10250T101	\$24.90	Black flush pushbutton operator
10250T103	24.90	Green flush pushbutton operator
10250T112	24.90	Red extended pushbutton operator
10250T122	53.00	Red mushroom head operator
10250T5	46.00	Push-pull maintained 2-position operator without lens
10250T17213	69.50	E-Stop mushroom operator
10250T411	92.00	Illuminated pushbutton operator, no lens, 120 Vac, incandescent
10250T172	63.00	Red jumbo mushroom head operator
10250T79	55.00	24/48V full votage push-pull light unit
10250T63	75.00	120V transformer incandescent push-pull light unit

Comes with retaining nut, operator gasket, and instruction sheet.

Ordering Example: 10250T101, black flush pushbutton operator, \$24.90.



10250T181N,
\$92



10250T231N,
\$103



10250T221N,
\$122



10250T201N,
\$75



To Order (Specify Model Number)

All models shown
smaller than actual size.

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
10250T INDICATING LIGHTS		
10250T221N	\$122.00	Pres-test 120V transformer type, no lens
10250T231N	103.00	Pres-test 120V full voltage/resistor type, no lens
10250T181N	92.00	120V transformer type, no lens
10250T201N	75.00	120V full voltage/resistor type, no lens

Comes with instruction sheet.

Ordering Example: 10250T221N, pre-test 120 V transformer type, \$122.



10250T1311,
\$34.25




10250T3011,
\$34.25



10250T1323,
\$34.25



10250T3023,
\$34.25



OPERATOR	DIM A mm (in)
Knob	35.1 (1.38)
Lever	38.1 (1.50)
Coin Slot	35.1 (1.38)

To Order (Specify Model Number)


All models shown
smaller than actual size.

AVAILABLE FOR FAST DELIVERY!




MODEL NO.	PRICE	DESCRIPTION
10250T SELECTOR SWITCHES – MAINTAINED		
10250T1311	\$34.25	2-position maintained selector switch, knob
10250T1323	34.25	3-position maintained selector switch, knob
10250T3011	34.25	2-position maintained selector switch, lever
10250T3023	34.25	3-position maintained selector switch, lever
10250T15112	90.00	2-position maintained selector switch, keyed
10250T15237	90.00	3-position maintained selector switch, keyed

Comes with instruction sheet.

Ordering Example: 10250T1311, 2 position maintained selector switch, knob, \$34.25.

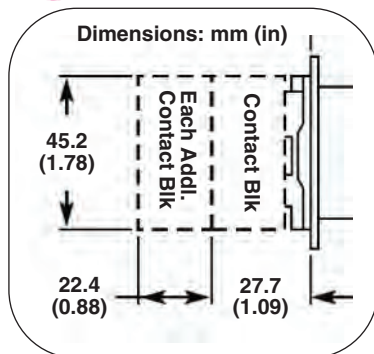

All models shown smaller than actual size.

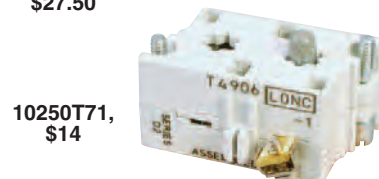

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
10250T PUSHBUTTONS CONTACT BLOCK		
10250T2	\$27.50	Contact block—2 NO, 6 blocks can be stacked
10250T3	27.50	Contact block—2 NC, 6 blocks can be stacked
10250T51	13.90	Contact block—1 NC, 6 blocks can be stacked
10250T53	13.90	Contact block—1 NO, 6 blocks can be stacked
10250T1	28.00	Contact block—NO-NC, 6 blocks can be stacked
10250T71	14.00	Contact block—late opening NC
10250T47	28.00	Contact block—early closing NO and standard NC
10250T57	28.00	Contact block—early closing NO and standard NO, 4 blocks can be stacked

Comes with instruction sheet.

Ordering Example: 10250T2, contact block, 2 normally open, \$27.50.



To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
10250T COMMON COMPLETE DEVICES (INCLUDES CONTACT BLOCKS)		
10250T20LB	\$63.00	On/Off switch (black knob switch comes with NO/NC contact block)
10250T21LB	63.00	H-O-A switch (black lever switch comes with 2 NO/2 NC contact blocks)
10250T23B	38.75	Start button (black flush button comes with NO contact block)
10250T25R	38.75	Stop button (red extended button comes with NC contact block)
10250T29	85.50	Emergency stop (red jumbo MRH button comes with NC contact block)

Comes with instruction sheet.

Ordering Example: 10250T29, emergency stop, \$85.50.



All models shown smaller than actual size.



10250TB62, \$7

10250TB63, \$7



10250TC47, \$7



10250TC53, \$7



10250TC57, \$16



10250TC63, \$16



To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
10250T PUSHBUTTONS – HEAD AND LENS SELECTION TABLE		
10250TB62	\$7.00	Red button for non-illuminated push-pull
10250TB63	7.00	Red (emergency stop) for non-illuminated push-pull
10250TJ62	38.00	Red jumbo mushroom head for non-illuminated push-pull
10250TJ63	45.00	Red jumbo mushroom head (emergency stop) for non-illuminated push-pull
10250TC47	7.00	Red lens for illuminated push-pull
10250TC53	7.00	Red (emergency stop) lens for illuminated push-pull
10250TC57	16.00	Red side-lighted anodized aluminum ring
10250TC63	16.00	Red (emergency stop) side-lighted anodized aluminum ring

Comes with instruction sheet.

Ordering Example: 10250TC57, red side-lighted anodized aluminum ring, \$16.



10250TC12N, \$11.70



10250TC13N, \$11.70



10250TC14N, \$11.70



10250TC15N, \$11.70



10250TC1N, \$6.55



10250TC6N, \$6.55



10250TC22, \$6.55



10250TC14N, \$11.70



10250TC8N, \$11.70



10250TC2N, \$6.55



10250TC21, \$6.55



10250TC43, \$6.55

All models shown smaller than actual size.


To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
10250T LENS FOR INDICATING LIGHTS		
10250TC12N	\$11.70	White, glass (for indicating lights)
10250TC13N	11.70	Red, glass (for PresTest or illuminated pushbuttons)
10250TC14N	11.70	Green, glass (for PresTest or illuminated pushbuttons)
10250TC15N	11.70	Amber, glass (for PresTest or illuminated pushbuttons)
10250TC19N	6.55	Amber, plastic (for indicating lights)
10250TC1N	6.55	Red, plastic (for indicating lights)
10250TC21	6.55	Red, plastic (for PresTest or illuminated pushbuttons)
10250TC22	6.55	Green, plastic (for PresTest or illuminated pushbuttons)
10250TC2N	6.55	Green, plastic (for indicating lights)
10250TC43	6.55	Amber, plastic (for PresTest or illuminated pushbuttons)
10250TC6N	6.55	White, plastic (for indicating lights)
10250TC7N	11.70	Red, glass (for indicating lights)
10250TC8N	11.70	Green, glass (for indicating lights)
10250TC9N	11.70	Amber, glass (for indicating lights)

Comes with instruction sheet.

Ordering Example: 10250TC12N, white, glass, \$11.70.

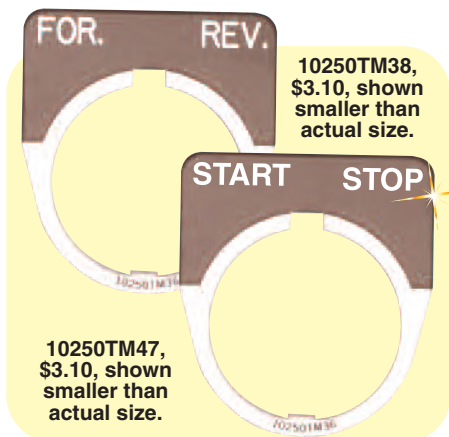

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
10250T LEGEND PLATES		
10250TM13	\$3.10	E-stop
10250TM24	3.10	Off
10250TM25	3.10	On
10250TM31	3.10	Run
10250TM33	3.10	Start
10250TM34	3.10	Stop
10250TM36	3.10	Blank
10250TM38	3.10	For/Rev
10250TM42	3.10	Off/On
10250TM47	3.10	Start/Stop
10250TM50	3.10	F-O-R
10250TM51	3.10	H-O-A
10250TM80	3.10	Power On

Comes with instruction sheet.

Ordering Example: 10250TM47, start/stop legend plate, \$3.10.

All models shown smaller than actual size.

10250TN11, \$92



10250TN12, \$103



10250TN13, \$122



10250TN14, \$150



To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
10250T ENCLOSURES		
10250TN11	\$92.00	1-hole 2-contact block depth enclosures
10250TN12	103.00	2-hole 2-contact block depth enclosures
10250TN13	122.00	3-hole 2-contact block depth enclosures
10250TN14	150.00	4-hole 2-contact block depth enclosures

Comes with instruction sheet.

Ordering Example: 102TN12, 2-hole, 2 contact block depth enclosure, \$103

All models shown smaller than actual size.



28-3044, \$7



28-3754, \$13



28-3755, \$13



28-494, \$13



28-5184, \$7



28-5185, \$7

To Order (Specify Model Number)

AVAILABLE FOR FAST DELIVERY!

MODEL NO.	PRICE	DESCRIPTION
REPLACEMENT LAMPS		
28-3044	\$7.00	120V, 10250T resistor indicating light
10250ED986-4	17.00	6.3V, 10250T flasher
28-2202	7.00	6.3V, 10250T transformer, PresTest and full voltage
28-5184	7.00	12V, 10250T full voltage
28-5185	7.00	24V, 10250T full voltage
28-5186	7.00	32V, 10250T full voltage
28-5187	7.00	55V, 10250T resistor
28-494	13.00	120V, 10250T neon
28-3754	13.00	120V, 10250T neon, T 31/4 bayonet
28-3755	13.00	24V, 10250T neon

Comes with instruction sheet.

Ordering Example: 28-3044, replacement lamp 120V, \$7



UNITED STATES

www.omega.com

1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca

Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de

Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk

Manchester, England
0800-488-488

FRANCE

www.omega.fr

Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz

Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl

Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters