


Lay-In Wireway Type 1 Quick-Connect Hinge Cover Data Sheet



Reversible and removable hinge cover

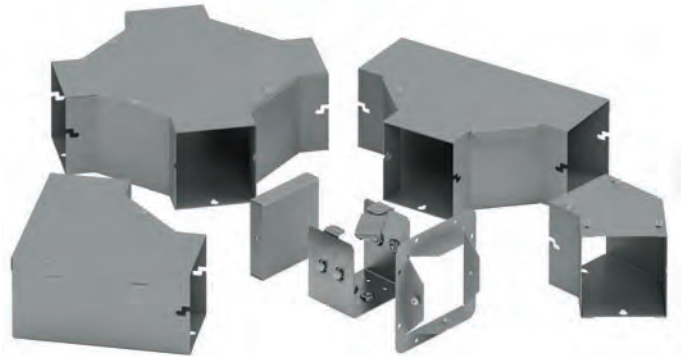

Pre-installed hardware on quick connector

Application

- Houses runs of control and power cable
- Used for cable and wire junction, distribution and termination

Standards

- UL 870 listed, Type 1
- CSA C22.2 No. 26 certified, Type 1
- Conforms to NEMA standard for Type 1

Finish

- Wash and phosphate undercoat
- ANSI 61 gray acrylic electrocoat finish

Accessories

- Touch-up paint
- See Accessories section

Protected by U.S. Patents 7,525,044 & 7,762,042

Construction

- Wireway body and cover are fabricated from code gauge steel, (see table, page 16)
- Wireway body has mounting holes on the back
- Wireway is available with or without knockouts
- Wireway fittings have no knockouts, ends are available with or without knockouts
- Wireway exceeding 72 inches in length has two overlapping covers
- Variety of fittings allow runs which can change directions, junction and terminate
- Wireway connectors (sold separately) have a gate feature which can swing completely open allowing for lay-in of wire and cable
- Universal style connectors are also available for adapting to other manufacturer's wireway, (see page 17)
- Except for wireway ends, completely interchangeable with Type 1 screw cover wireway and fittings through use of the adapter style connector HSCA, (see page 17)


Discount Schedule: A2

Subclass: HS1

Notes: Cooper B-Line can provide special sizes, finishes and other modifications. Consult the factory for your special requirements.

Lay-In Wireway Type 1 Quick-Connect Hinge Cover Illustration Sheet and Catalog Number

| Wireway Catalog Number | | Wireway Size Height x Depth x Length | | D | | Gauge | Knockout Quantity | |
|------------------------|---------------|--------------------------------------|------------------|-------|-----|-------|-------------------|--------|
| KO | No KO | A x B x C | | in. | mm | | Top | Bottom |
| | | in. | mm | | | | | |
| 2212 HS | 2212 HS NK | 2.50 x 2.50 x 12.00 | 63 x 63 x 305 | 1.25 | 32 | 16 | 3 | 3 |
| 2224 HS | 2224 HS NK | 2.50 x 2.50 x 24.00 | 63 x 63 x 610 | 1.25 | 32 | 16 | 7 | 7 |
| 2236 HS | 2236 HS NK | 2.50 x 2.50 x 36.00 | 63 x 63 x 914 | 1.25 | 32 | 16 | 11 | 11 |
| 2248 HS | 2248 HS NK | 2.50 x 2.50 x 48.00 | 63 x 63 x 1219 | 1.25 | 32 | 16 | 15 | 15 |
| 2260 HS | 2260 HS NK | 2.50 x 2.50 x 60.00 | 63 x 63 x 1524 | 1.25 | 32 | 16 | 19 | 19 |
| 2272 HS | 2272 HS NK | 2.50 x 2.50 x 72.00 | 63 x 63 x 1829 | 1.25 | 32 | 16 | 23 | 23 |
| 22120 HS | 22120 HS NK | 2.50 x 2.50 x 120.00 | 63 x 63 x 3048 | 1.25 | 32 | 16 | 39 | 39 |
| 4412 HS | 4412 HS NK | 4.00 x 4.00 x 12.00 | 102 x 102 x 305 | 2.75 | 70 | 16 | 3 | 3 |
| 4424 HS | 4424 HS NK | 4.00 x 4.00 x 24.00 | 102 x 102 x 610 | 2.75 | 70 | 16 | 7 | 7 |
| 4436 HS | 4436 HS NK | 4.00 x 4.00 x 36.00 | 102 x 102 x 914 | 2.75 | 70 | 16 | 11 | 11 |
| 4448 HS | 4448 HS NK | 4.00 x 4.00 x 48.00 | 102 x 102 x 1219 | 2.75 | 70 | 16 | 15 | 15 |
| 4460 HS | 4460 HS NK | 4.00 x 4.00 x 60.00 | 102 x 102 x 1524 | 2.75 | 70 | 16 | 19 | 19 |
| 4472 HS | 4472 HS NK | 4.00 x 4.00 x 72.00 | 102 x 102 x 1829 | 2.75 | 70 | 16 | 23 | 23 |
| 44120 HS | 44120 HS NK | 4.00 x 4.00 x 120.00 | 102 x 102 x 3048 | 2.75 | 70 | 16 | 39 | 39 |
| 6612 HS | 6612 HS NK | 6.00 x 6.00 x 12.00 | 152 x 152 x 305 | 4.25 | 108 | 16 | 3 | 3 |
| 6624 HS | 6624 HS NK | 6.00 x 6.00 x 24.00 | 152 x 152 x 610 | 4.25 | 108 | 16 | 7 | 7 |
| 6636 HS | 6636 HS NK | 6.00 x 6.00 x 36.00 | 152 x 152 x 914 | 4.25 | 108 | 16 | 11 | 11 |
| 6648 HS | 6648 HS NK | 6.00 x 6.00 x 48.00 | 152 x 152 x 1219 | 4.25 | 108 | 16 | 15 | 15 |
| 6660 HS | 6660 HS NK | 6.00 x 6.00 x 60.00 | 152 x 152 x 1524 | 4.25 | 108 | 16 | 19 | 19 |
| 6672 HS | 6672 HS NK | 6.00 x 6.00 x 72.00 | 152 x 152 x 1829 | 4.25 | 108 | 16 | 23 | 23 |
| 66120 HS | 66120 HS NK | 6.00 x 6.00 x 120.00 | 152 x 152 x 3048 | 4.25 | 108 | 16 | 39 | 39 |
| 8812 HS | 8812 HS NK | 8.00 x 8.00 x 12.00 | 203 x 203 x 305 | 6.00 | 152 | 14 | 3 | 3 |
| 8824 HS | 8824 HS NK | 8.00 x 8.00 x 24.00 | 203 x 203 x 610 | 6.00 | 152 | 14 | 7 | 7 |
| 8836 HS | 8836 HS NK | 8.00 x 8.00 x 36.00 | 203 x 203 x 914 | 6.00 | 152 | 14 | 11 | 11 |
| 8848 HS | 8848 HS NK | 8.00 x 8.00 x 48.00 | 203 x 203 x 1219 | 6.00 | 152 | 14 | 15 | 15 |
| 8860 HS | 8860 HS NK | 8.00 x 8.00 x 60.00 | 203 x 203 x 1524 | 6.00 | 152 | 14 | 19 | 19 |
| 8872 HS | 8872 HS NK | 8.00 x 8.00 x 72.00 | 203 x 203 x 1829 | 6.00 | 152 | 14 | 23 | 23 |
| 88120 HS | 88120 HS NK | 8.00 x 8.00 x 120.00 | 203 x 203 x 3048 | 6.00 | 152 | 14 | 39 | 39 |
| 101012 HS | 101012 HS NK | 10.00 x 10.00 x 12.00 | 254 x 254 x 305 | 8.00 | 203 | 14 | 3 | 3 |
| 101024 HS | 101024 HS NK | 10.00 x 10.00 x 24.00 | 254 x 254 x 610 | 8.00 | 203 | 14 | 7 | 7 |
| 101036 HS | 101036 HS NK | 10.00 x 10.00 x 36.00 | 254 x 254 x 914 | 8.00 | 203 | 14 | 11 | 11 |
| 101048 HS | 101048 HS NK | 10.00 x 10.00 x 48.00 | 254 x 254 x 1219 | 8.00 | 203 | 14 | 15 | 15 |
| 101060 HS | 101060 HS NK | 10.00 x 10.00 x 60.00 | 254 x 254 x 1524 | 8.00 | 203 | 14 | 19 | 19 |
| 1010120 HS | 1010120 HS NK | 10.00 x 10.00 x 120.00 | 254 x 254 x 3048 | 8.00 | 203 | 14 | 39 | 39 |
| 121212 HS | 121212 HS NK | 12.00 x 12.00 x 12.00 | 305 x 305 x 305 | 10.00 | 254 | 14 | 3 | 3 |
| 121224 HS | 121224 HS NK | 12.00 x 12.00 x 24.00 | 305 x 305 x 610 | 10.00 | 254 | 14 | 7 | 7 |
| 121236 HS | 121236 HS NK | 12.00 x 12.00 x 36.00 | 305 x 305 x 914 | 10.00 | 254 | 14 | 11 | 11 |
| 121248 HS | 121248 HS NK | 12.00 x 12.00 x 48.00 | 305 x 305 x 1219 | 10.00 | 254 | 14 | 15 | 15 |
| 121260 HS | 121260 HS NK | 12.00 x 12.00 x 60.00 | 305 x 305 x 1524 | 10.00 | 254 | 14 | 19 | 19 |
| 1212120 HS | 1212120 HS NK | 12.00 x 12.00 x 120.00 | 305 x 305 x 3048 | 10.00 | 254 | 14 | 39 | 39 |

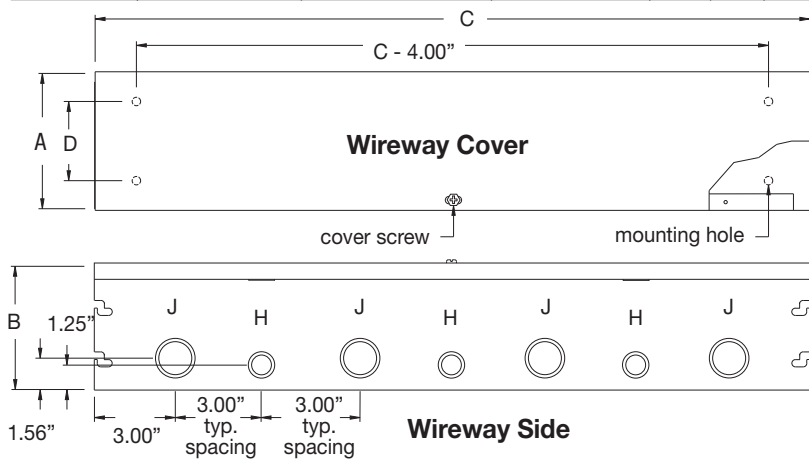


Wireway Section
Lengths from 12.00" (305 mm) to 120.00" (305 mm). Wireway exceeding 72.00" (1829 mm) has two covers. Shown with KO's, also available without.

Knockout sizes:
H = 3/4" or 1/2" conduit
J = 1/4" or 1" conduit


Notes: Additional mounting holes are furnished when C dimension is over 60.00" (1524 mm).
Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.

Lay-In Wireway Type 1 Quick-Connect Hinge Cover Illustration Sheet and Catalog Number



Telescopic Fitting
Adjustable length up to 10.00" (254 mm). Wraps around the two near joining wireway lengths to achieve a continuous run.


| Telescopic Fitting | | | | | | | | |
|--------------------|-------|-----|-------|-----|------|----|-------|-----|
| Catalog Number | A | | B1 | | B2 | | C | |
| | in. | mm | in. | mm | in. | mm | in. | mm |
| 22 FTF | 2.75 | 70 | 1.75 | 44 | 1.12 | 28 | 12.00 | 305 |
| 33FTF | 3.25 | 83 | 2.25 | 57 | 1.12 | 28 | 12.00 | 305 |
| 44 FTF | 4.25 | 108 | 3.25 | 83 | 1.12 | 28 | 12.00 | 305 |
| 66 FTF | 6.25 | 159 | 5.25 | 133 | 1.12 | 28 | 12.00 | 305 |
| 88 FTF | 8.25 | 210 | 7.25 | 184 | 1.12 | 28 | 12.00 | 305 |
| 1010 FTF | 10.25 | 260 | 9.25 | 235 | 1.12 | 28 | 12.00 | 305 |
| 1212 FTF | 12.25 | 311 | 11.25 | 286 | 1.12 | 28 | 12.00 | 305 |

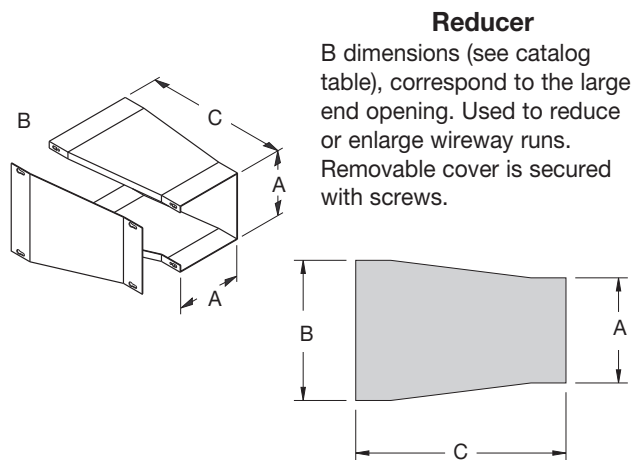

Reducer
B dimensions (see catalog table), correspond to the large end opening. Used to reduce or enlarge wireway runs. Removable cover is secured with screws.


| Reducer | | | | | | |
|----------------|-------|-----|-------|-----|-------|-----|
| Catalog Number | A | | B | | C | |
| | in. | mm | in. | mm | in. | mm |
| 2233 FR * | 2.50 | 63 | 3.00 | 76 | 6.00 | 152 |
| 3344 FR * | 3.00 | 76 | 4.00 | 102 | 8.00 | 203 |
| 4466 FR * | 4.00 | 102 | 6.00 | 152 | 10.00 | 254 |
| 6688 FR * | 6.00 | 152 | 8.00 | 203 | 12.00 | 305 |
| 881010 FR * | 8.00 | 203 | 10.00 | 254 | 12.00 | 305 |
| 10101212 FR * | 10.00 | 254 | 12.00 | 305 | 16.00 | 406 |

* Requires use of HSCA Adapter Style Connector.

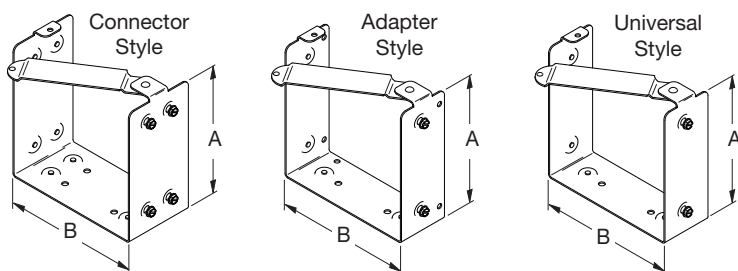

Connector

Swing gate allows for lay-in of wire and cable.



End
Used to terminate wireway or fitting. Shown with KO, also available without.

Drawing shows screws in place. Screws are actually packaged in plastic bags.


| Connector | | | | | | |
|-----------------|---------------|-----------------|-------|-----|-------|-----|
| Catalog Number | | | A | | B | |
| Connector Style | Adapter Style | Universal Style | in. | mm | in. | mm |
| 22 HSC | 22 HSCA | 22 HSCU | 2.50 | 63 | 2.50 | 63 |
| 44 HSC | 44 HSCA | 44 HSCU | 4.00 | 102 | 4.00 | 102 |
| 66 HSC | 66 HSCA | 66 HSCU | 6.00 | 152 | 6.00 | 152 |
| 88 HSC | 88 HSCA | 88 HSCU | 8.00 | 203 | 8.00 | 203 |
| 1010 HSC | 1010 HSCA | 1010 HSCU | 10.00 | 254 | 10.00 | 254 |
| 1212 HSC | 1212 HSCA | 1212 HSCU | 12.00 | 305 | 12.00 | 305 |

HSC - Standard Quick Connector
HSCA - For adapting to Type 1 Screw Cover Wireway
HSCU - For adapting to competitive Wireway

| End | | | | | | | |
|----------------|-------------|-------|-----|-------|-----|------|----|
| Catalog Number | | A | | B | | KO | |
| KO | No KO | in. | mm | in. | mm | in. | mm |
| 22 HSE | 22 HSE NK | 2.50 | 63 | 2.50 | 63 | 1.50 | 38 |
| 44 HSE | 44 HSE NK | 4.00 | 102 | 4.00 | 102 | 1.50 | 38 |
| 66 HSE | 66 HSE NK | 6.00 | 152 | 6.00 | 152 | 1.50 | 38 |
| 88 HSE | 88 HSE NK | 8.00 | 203 | 8.00 | 203 | 1.50 | 38 |
| 1010 HSE | 1010 HSE NK | 10.00 | 254 | 10.00 | 254 | 3.00 | 76 |
| 1212 HSE | 1212 HSE NK | 12.00 | 305 | 12.00 | 305 | 3.00 | 76 |


Notes: Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.

Lay-In Wireway Type 1 Quick-Connect Hinge Cover Illustration Sheet and Catalog Number



Wireway End Flange
Allows for a secure connection of wireway to an adjoining enclosure or wall.

| Wireway End Flange | | | | | | | | |
|--------------------|-------|-----|-------|-----|-------|-----|-------|-----|
| Catalog Number | A | | B | | E | | F | |
| | in. | mm | in. | mm | in. | mm | in. | mm |
| 22 HSF | 2.50 | 63 | 2.50 | 63 | 4.00 | 102 | 4.00 | 102 |
| 44 HSF | 4.00 | 102 | 4.00 | 102 | 5.50 | 140 | 5.50 | 140 |
| 66 HSF | 6.00 | 152 | 6.00 | 152 | 7.50 | 191 | 7.50 | 191 |
| 88 HSF | 8.00 | 203 | 8.00 | 203 | 9.50 | 241 | 9.50 | 241 |
| 1010 HSF | 10.00 | 254 | 10.00 | 254 | 11.50 | 292 | 11.50 | 292 |
| 1212 HSF | 12.00 | 305 | 12.00 | 305 | 13.50 | 343 | 13.50 | 343 |

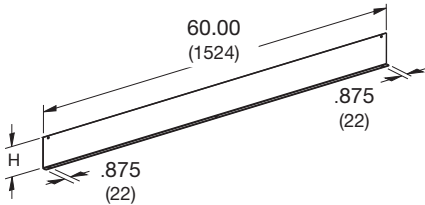


Barrier, Bolt-On

For those installations that require separate wiring compartments.

| Barrier Kit, 60" Bolt-On | | | | | | |
|--------------------------|---------------|-----------|--------|------|-------|-----|
| Catalog Number | Size | | Length | | H | |
| | in. | mm | in. | mm | in. | mm |
| 22-12BK* | 2.50 x 2.50 | 64 x 64 | 60.00 | 1524 | 1.88 | 48 |
| 33-12BK* | 3.00 x 3.00 | 76 x 76 | 60.00 | 1524 | 2.25 | 57 |
| 44-12BK* | 4.00 x 4.00 | 102 x 102 | 60.00 | 1524 | 3.00 | 76 |
| 66-12BK* | 6.00 x 6.00 | 152 x 152 | 60.00 | 1524 | 4.50 | 114 |
| 88-12BK* | 8.00 x 8.00 | 203 x 203 | 60.00 | 1524 | 6.00 | 152 |
| 1010-12BK* | 10.00 x 10.00 | 254 x 254 | 60.00 | 1524 | 8.00 | 203 |
| 1212-12BK* | 12.00 x 12.00 | 305 x 305 | 60.00 | 1524 | 10.50 | 267 |

*Not UL or CSA listed fitting.

Wireway Hangers

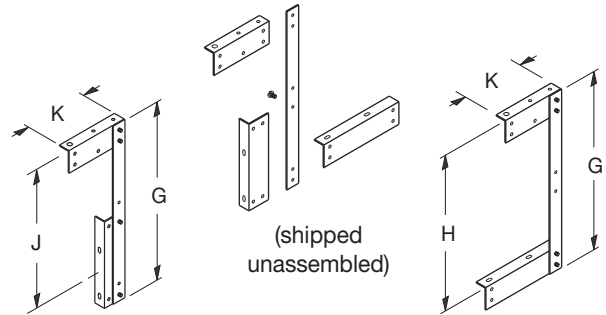

Side Cover Assembly

For those installations where the wireway cover must be hinged at the side.

Top Cover Assembly

For those installations where the wireway cover must be hinged at the top.


| Wireway Hanger | | | | | | | | |
|----------------|-------|-----|-------|-----|-------|-----|------|-----|
| Catalog Number | G | | H | | J | | K | |
| | in. | mm | in. | mm | in. | mm | in. | mm |
| 22 FH | 8.50 | 216 | 8.50 | 216 | 6.50 | 165 | 2.87 | 73 |
| 44 FH | 12.50 | 318 | 10.50 | 267 | 10.37 | 263 | 4.87 | 121 |
| 66 FH | 16.50 | 419 | 14.50 | 394 | 13.50 | 340 | 5.87 | 146 |
| 88 FH | 20.50 | 521 | 18.50 | 495 | 16.75 | 425 | 6.87 | 171 |
| 1010 FH ** | 24.50 | 622 | 22.50 | 571 | 17.25 | 438 | 7.87 | 200 |
| 1212 FH ** | 28.50 | 724 | 26.50 | 673 | 20.25 | 514 | 8.87 | 225 |

**Hangers are shipped welded in the top cover assembly position.

Notes: Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.


Lay-In Wireway Type 1 Quick-Connect Hinge Cover Illustration Sheet and Catalog Number

Wireway 90° Elbows




Inside Opening

Specifically designed to have only the inside cover hinge open to allow a continuous run with 90° turns.




Side Opening

Side cover is hinged to allow a continuous run on designs with 90° sweeping turns.




Outside Opening

Specifically designed to have the outside covers hinge open to allow a continuous run with 90° turns.




(outside opening)



(inside and side opening)


| 90° Elbow | | | | | | | | |
|----------------|-------|-----|-------|-----|------|-----|------|-----|
| Catalog Number | A | | B | | E | | F | |
| | in. | mm | in. | mm | in. | mm | in. | mm |
| 22 HSL IN | 2.50 | 63 | 2.50 | 63 | 3.31 | 84 | 3.31 | 84 |
| 44 HSL IN | 4.00 | 102 | 4.00 | 102 | 4.06 | 103 | 4.06 | 103 |
| 66 HSL IN | 6.00 | 152 | 6.00 | 152 | 5.06 | 128 | 5.06 | 128 |
| 88 HSL IN | 8.00 | 203 | 8.00 | 203 | 6.06 | 154 | 6.06 | 154 |
| 1010 HSL IN | 10.00 | 254 | 10.00 | 254 | 7.06 | 179 | 7.06 | 179 |
| 1212 HSL IN | 12.00 | 305 | 12.00 | 305 | 8.06 | 205 | 8.06 | 205 |
| 22 HSL OUT | 2.50 | 63 | 2.50 | 63 | 3.38 | 86 | 3.38 | 86 |
| 44 HSL OUT | 4.00 | 102 | 4.00 | 102 | 4.09 | 104 | 4.09 | 104 |
| 66 HSL OUT | 6.00 | 152 | 6.00 | 152 | 5.09 | 129 | 5.09 | 129 |
| 88 HSL OUT | 8.00 | 203 | 8.00 | 203 | 6.09 | 154 | 6.09 | 154 |
| 1010 HSL OUT | 10.00 | 254 | 10.00 | 254 | 7.09 | 180 | 7.09 | 180 |
| 1212 HSL OUT | 12.00 | 305 | 12.00 | 305 | 8.09 | 205 | 8.09 | 205 |
| 22 HSL SIDE | 2.50 | 63 | 2.50 | 63 | 3.50 | 89 | 3.50 | 89 |
| 44 HSL SIDE | 4.00 | 102 | 4.00 | 102 | 4.32 | 110 | 4.32 | 110 |
| 66 HSL SIDE | 6.00 | 152 | 6.00 | 152 | 5.31 | 135 | 5.31 | 135 |
| 88 HSL SIDE | 8.00 | 203 | 8.00 | 203 | 6.31 | 160 | 6.31 | 160 |
| 1010 HSL SIDE | 10.00 | 254 | 10.00 | 254 | 7.31 | 185 | 7.31 | 185 |
| 1212 HSL SIDE | 12.00 | 305 | 12.00 | 305 | 8.31 | 211 | 8.31 | 211 |

Wireway 45° Elbows



Combo Opening


Designed to achieve a 45° turn. Inside and outside removable covers are secured with screws.



Side Opening


Designed to achieve a 45° turn and have the cover removed from the side. Excellent for combining two to make a gradual 90° sweep.

| 45° Elbow | | | | | | | | |
|------------------|-------|-----|-------|-----|------|-----|------|-----|
| Catalog Number | A | | B | | E | | F | |
| | in. | mm | in. | mm | in. | mm | in. | mm |
| 2245 HSL COMBO | 2.50 | 63 | 2.50 | 63 | 1.72 | 43 | 1.72 | 43 |
| 4445 HSL COMBO | 4.00 | 102 | 4.00 | 102 | 2.75 | 70 | 2.75 | 70 |
| 6645 HSL COMBO | 6.00 | 152 | 6.00 | 152 | 3.18 | 81 | 3.18 | 81 |
| 8845 HSL COMBO | 8.00 | 203 | 8.00 | 203 | 3.62 | 92 | 3.62 | 92 |
| 101045 HSL COMBO | 10.00 | 254 | 10.00 | 254 | 4.06 | 103 | 4.06 | 103 |
| 121245 HSL COMBO | 12.00 | 305 | 12.00 | 305 | 4.50 | 114 | 4.50 | 114 |
| 2245 HSL SIDE | 2.50 | 63 | 2.50 | 63 | 1.72 | 43 | 1.72 | 43 |
| 4445 HSL SIDE | 4.00 | 102 | 4.00 | 102 | 2.75 | 70 | 2.75 | 70 |
| 6645 HSL SIDE | 6.00 | 152 | 6.00 | 152 | 3.18 | 81 | 3.18 | 81 |
| 8845 HSL SIDE | 8.00 | 203 | 8.00 | 203 | 3.62 | 92 | 3.62 | 92 |
| 101045 HSL SIDE | 10.00 | 254 | 10.00 | 254 | 4.06 | 103 | 4.06 | 103 |
| 121245 HSL SIDE | 12.00 | 305 | 12.00 | 254 | 4.50 | 114 | 4.50 | 114 |




Notes: Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.

Lay-In Wireway Type 1 Quick-Connect Hinge Cover Illustration Sheet and Catalog Number




Tee

Side hinge cover design for applications where a "T" junction is necessary.

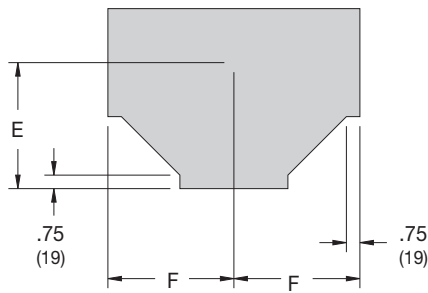


| Catalog Number | A | | B | | E | | F | |
|----------------|-------|-----|-------|-----|-------|-----|-------|-----|
| | in. | mm | in. | mm | in. | mm | in. | mm |
| 22 HST | 2.50 | 63 | 2.50 | 63 | 5.38 | 136 | 4.25 | 198 |
| 44 HST | 4.00 | 102 | 4.00 | 102 | 6.15 | 156 | 6.12 | 155 |
| 66 HST | 6.00 | 152 | 6.00 | 152 | 7.15 | 181 | 7.12 | 181 |
| 88 HST | 8.00 | 203 | 8.00 | 203 | 8.15 | 207 | 8.12 | 206 |
| 1010 HST | 10.00 | 254 | 10.00 | 254 | 9.15 | 232 | 9.12 | 231 |
| 1212 HST | 12.00 | 305 | 12.00 | 305 | 10.15 | 258 | 10.12 | 257 |



Cross

Side cover and broad body design to junction cable run in four directions. Removable cover is secured with screws.

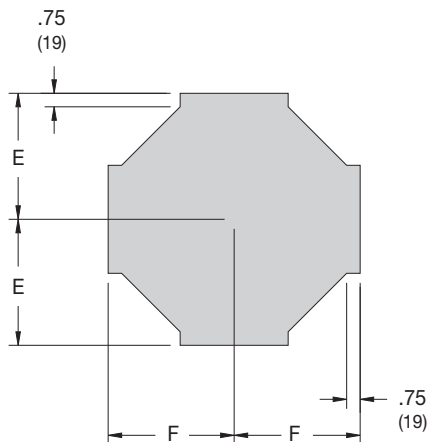

| Catalog Number | A | | B | | E | | F | |
|----------------|-------|-----|-------|-----|-------|-----|-------|-----|
| | in. | mm | in. | mm | in. | mm | in. | mm |
| 22 HSX | 2.50 | 63 | 2.50 | 63 | 5.97 | 151 | 5.97 | 151 |
| 44 HSX | 4.00 | 102 | 4.00 | 102 | 6.75 | 171 | 6.75 | 171 |
| 66 HSX | 6.00 | 152 | 6.00 | 152 | 7.75 | 197 | 7.75 | 197 |
| 88 HSX | 8.00 | 203 | 8.00 | 203 | 8.75 | 222 | 8.75 | 222 |
| 1010 HSX | 10.00 | 254 | 10.00 | 254 | 9.75 | 247 | 9.75 | 247 |
| 1212 HSX | 12.00 | 305 | 12.00 | 305 | 10.75 | 273 | 10.75 | 273 |

Notes: Dimensions are in inches. Millimeters shown are for reference only. Data subject to change without notice.