


12, 14 and 19-Pin M16 versafast® Receptacles, Rear Mount

- Female Receptacles
- For use with Junction Box Home Run Cables
- NEMA 1, 3, 4, 6P
- IEC IP 68 Protection



Housing Style	Part Number	Lead Specs.	Application	Pinout																			
8	BKFD 12-12-*	Nickel Plated Brass 12x24 AWG 105°C 125 V, 4 A	Mates with 12-pin connectors, 12 conductors	<table border="0"> <tr><td>A. BN</td><td>G. PK</td></tr> <tr><td>B. BU</td><td>H. RD</td></tr> <tr><td>C. WH</td><td>J. BK</td></tr> <tr><td>D. GN</td><td>K. OG</td></tr> <tr><td>E. YE</td><td>L. TN</td></tr> <tr><td>F. GY</td><td>M. VT</td></tr> </table>	A. BN	G. PK	B. BU	H. RD	C. WH	J. BK	D. GN	K. OG	E. YE	L. TN	F. GY	M. VT							
	A. BN	G. PK																					
	B. BU	H. RD																					
	C. WH	J. BK																					
	D. GN	K. OG																					
E. YE	L. TN																						
F. GY	M. VT																						
BKFD 14-10-*	Nickel Plated Brass 10x24 AWG 105°C 125 V, 3 A	Mates with 14-pin connectors, 10 conductors	<table border="0"> <tr><td>C. GY</td><td>O. YE</td></tr> <tr><td>E. GN</td><td>P. WH</td></tr> <tr><td>G. BK</td><td>R. RD</td></tr> <tr><td>M. BN</td><td>S. VT</td></tr> <tr><td>N. PK</td><td>U. BU</td></tr> </table>	C. GY	O. YE	E. GN	P. WH	G. BK	R. RD	M. BN	S. VT	N. PK	U. BU										
C. GY	O. YE																						
E. GN	P. WH																						
G. BK	R. RD																						
M. BN	S. VT																						
N. PK	U. BU																						
BKFD 14-12-*	Nickel Plated Brass 12x24 AWG 105°C 125 V, 3 A	Mates with 14-pin connectors, 12 conductors	<table border="0"> <tr><td>C. OG</td><td>O. VT</td></tr> <tr><td>E. BK</td><td>P. RD</td></tr> <tr><td>G. GN</td><td>R. WH</td></tr> <tr><td>J. GY</td><td>S. YE</td></tr> <tr><td>M. BN</td><td>T. PK</td></tr> <tr><td>N. TN</td><td>U. BU</td></tr> </table>	C. OG	O. VT	E. BK	P. RD	G. GN	R. WH	J. GY	S. YE	M. BN	T. PK	N. TN	U. BU								
C. OG	O. VT																						
E. BK	P. RD																						
G. GN	R. WH																						
J. GY	S. YE																						
M. BN	T. PK																						
N. TN	U. BU																						
BKFD 14-14-*	Nickel Plated Brass 14x24 AWG 105°C 125 V, 3 A	Mates with 14-pin connectors, 14 conductors	<table border="0"> <tr><td>A. BN</td><td>N. GY/BN</td></tr> <tr><td>C. RD/BU</td><td>O. VT</td></tr> <tr><td>E. BK</td><td>P. WH</td></tr> <tr><td>G. PK</td><td>R. RD</td></tr> <tr><td>J. GN</td><td>S. GY</td></tr> <tr><td>L. BU</td><td>T. YE</td></tr> <tr><td>M. OG</td><td>U. TN</td></tr> </table>	A. BN	N. GY/BN	C. RD/BU	O. VT	E. BK	P. WH	G. PK	R. RD	J. GN	S. GY	L. BU	T. YE	M. OG	U. TN						
A. BN	N. GY/BN																						
C. RD/BU	O. VT																						
E. BK	P. WH																						
G. PK	R. RD																						
J. GN	S. GY																						
L. BU	T. YE																						
M. OG	U. TN																						
BKFD 19-19-*	Nickel Plated Brass 19x24 AWG 105°C 30 V, 3 A	Mates with 19-pin connectors, 19 conductors	<table border="0"> <tr><td>A. BU</td><td>L. BN</td></tr> <tr><td>B. GY/PK</td><td>M. OG</td></tr> <tr><td>C. RD/BU</td><td>N. GY/BN</td></tr> <tr><td>D. WH/GN</td><td>O. VT</td></tr> <tr><td>E. BK</td><td>P. WH</td></tr> <tr><td>F. BN/GN</td><td>R. RD</td></tr> <tr><td>G. PK</td><td>S. GY</td></tr> <tr><td>H. WH/YE</td><td>T. YE</td></tr> <tr><td>I. GN</td><td>U. TN</td></tr> <tr><td>K. YE/BN</td><td></td></tr> </table>	A. BU	L. BN	B. GY/PK	M. OG	C. RD/BU	N. GY/BN	D. WH/GN	O. VT	E. BK	P. WH	F. BN/GN	R. RD	G. PK	S. GY	H. WH/YE	T. YE	I. GN	U. TN	K. YE/BN	
A. BU	L. BN																						
B. GY/PK	M. OG																						
C. RD/BU	N. GY/BN																						
D. WH/GN	O. VT																						
E. BK	P. WH																						
F. BN/GN	R. RD																						
G. PK	S. GY																						
H. WH/YE	T. YE																						
I. GN	U. TN																						
K. YE/BN																							

Receptacles

See page G33 for dimensional drawings.


* Length in meters. Standard lead length is 1 Meter. Consult factory for other lengths.

Available with spanner nut as an option (vs. Hex locknut). Add "/S1046" to end of description.

To specify PVC jacketed cable, add "/S717" to the end of the part number.

M16 versafast® Receptacles

1

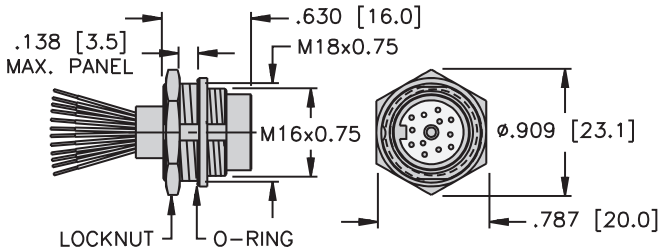


Typical panel cutout is 18 x 17 mm.

BSF .. (5-8, 12-19 pin)

Page G37 - G38

2

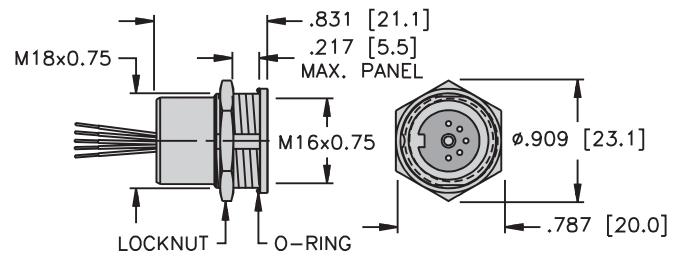


Typical panel cutout is 18 x 17 mm.

BKF .. (5-8 pin)

Page G39

3

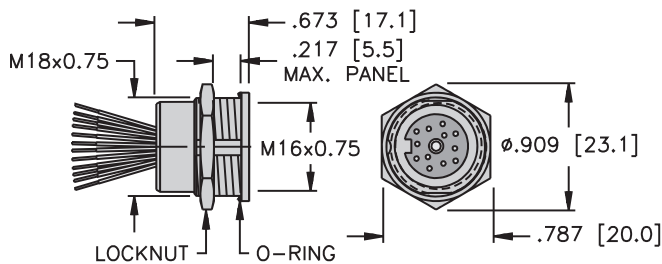


Typical panel cutout is 18 x 17 mm.

BKF .. (12-19 pin)

Page G40

4

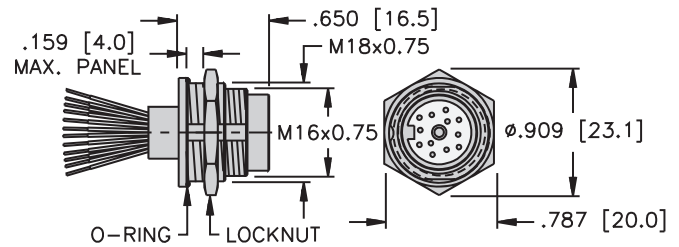


Typical panel cutout is 18 x 17 mm.

BSFD .. (5-8, 12-19 pin)

Page G57 - G58


5

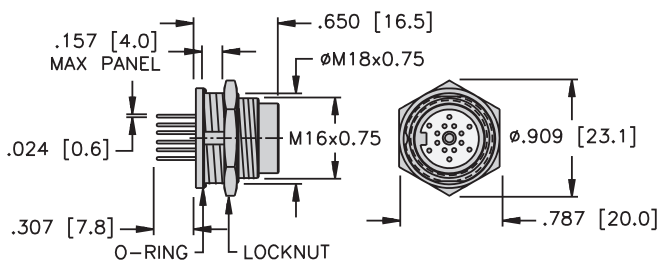

BSFD ..PCB (5-8, 12-19 pin)

Page G65 - G66


6

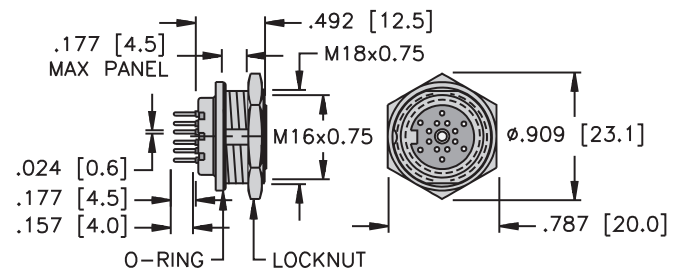

BKFD ..PCB (5-8, 12-19 pin)

Page G67 - G68

7

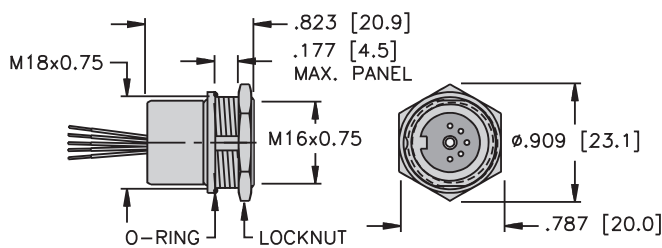


Typical panel cutout is 18 x 17 mm.

BKFD .. (5-8 pin)

Page G59

8

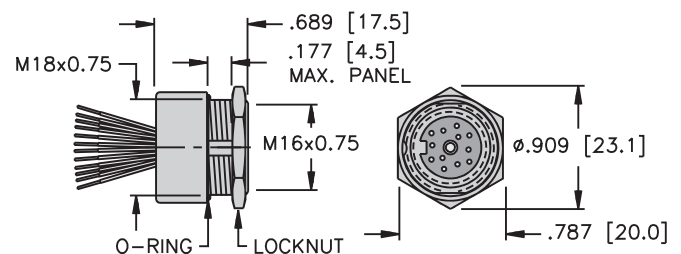

Typical panel cutout is 18 x 17 mm.

BKFD .. (12-19 pin)

Page G60