

1000 Series **Digital Panel Meters**

MODUTEC

BEST 5







Backlighting Options

- Positive Green Black on Green Background
- Negative Green Green on Black Background
- Positive Red Black on Red Background
- Negative Red Red on Black Background
- Non-Backlit LCD Black on Grey Background

The Modutec 1000 takes the guesswork out of reading a small, low cost, digital panel meter.

Always have an exact reading with features that eliminate reader guesswork.

- Over range indication of rated value and auto zero when there is no input signal
- Auto polarity visually clues user to a negative reading

The Modutec 1000 is an easy to read small unit that fits into almost any application.

- 0.3 inch digit display in red or green for hard to read applications
- Small panel space requirements of 1.34" x 0.75" and panel depth less than 0.8"
- Bezel or window mount snap-on bezel needing no extra hardware or panel holes.

Flexible features designed to meet your application needs.

- DC power options¹
- Process and DC inputs with offset and span adjustments²
- Low power usage allowing battery operation even with backlighting
- Wide operating temperature range -30° to 80°C (optional)
 - ¹Case and set points specs are available on our web site.
 - ²Consult factory

Specifications

Display

Digits: $3 \frac{1}{2}$ digits (1999) **Digit Height:** 0.3" (7.6 mm) **Decimal Point:** 3 positions, external selection

Type: 7 Segment Backlit LCD **Polarity:** Automatic (-) displayed Overload: Three lower digits blank for readings greater than 1999

Weight:


< 1 oz.

Applications

- **DC** Amps
- **DC Volts**
- **Telecommunications**
- **Water Purification**
- Sewage Treatment
- Flow
- **Process**
- Desalinization



1000 Series Dimensional Drawings (mm/in)

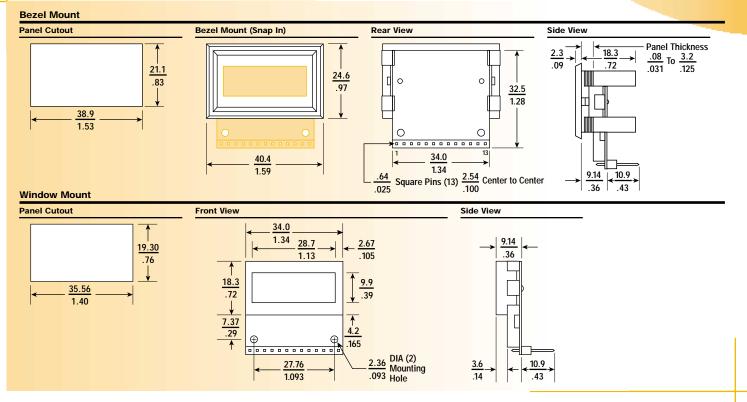

How to Order



Display

1 = Non Backlit

3 = Positive Green Backlit

4 = Negative Green Backlit

5 = Negative Red Backlit

6 = Positive Red Backlit

Mounting

0 = Window Mount (for Bezel option See Note-1)

- 0 = Uncased for Window Mount or **Bezel Mount with 13 Pins**
- 2 = solder pads*
- 4 = Dual Banana plug for direct transmitter mounting*
- 5 = Screw terminal block & brackets for mounting in explosion proof housings*
- Refer to the datasheets on our website for additional drawings and dimensions

DPM Power

0 = Loop powered from signal (two wire) including backlighting 3 = 5V

1 = 9VDC

 $2 = \pm 5VDC$ 6 = 10/15VDC

Input

01 = 200 mVDC

03 = 20VDC02 = 2VDC19 = 4 to 20mADC

Note-1: For Snap-on Bezel mounting kit, order part number 00-922233-001.

Example: 1030-0202 is a ±5VDC powered Window Mount unit with positive green backlighting, a 0 - 2VDC input scale, with a 13 pin connector.

1000 Series Specifications

Full Scale Range: \pm 2V or \pm 200m VDC or \pm 20VDC or \pm 4-20ma **Overvoltage Protection:** 100V DC or peak AC continuous

Input Resistance: ≥ 100 Meg Ohms

Loop Powered:

Full Scale Range: 4 to 20 mADC (two wire self powered)

> 2.75V (including green backlighting) 3.3V (including red backlighting) 60 mADC forward, 75mADC reverse

Overload:

Performance Accuracy: \pm (0.25% +1 count) Max **Conversion Rate:** 2.5 per second

 $4-20 \text{ ma} \pm 0.1\% \text{ of F.S.} + 1 \text{ count}$ **Zero Adjust:** Automatic **Common Mode Rejection: Tempco:** 100 PPM/°C

> ≥ 86db 50 Hz-60 Hz $4-20 \text{ ma} \pm 200 \text{ PPM/°C}$

Loop Powered Adjustment:

Span: Coarse by jumper plug, fine by 12-turn potetiometer

Zero: Approximately 20% of selected span by 12-turn potentiometer.

Environment:

Operating Range: -0°C to $+60^{\circ}\text{C}$ **Storage Range:** -20°C to + 70°C

Extended Temperature (option):

Operating Range: -30°C to +80°C **Storage Range:** -40°C to + 85°C

Power Options:


9VDC (7.2 to 12 VDC isolated @ 150uaDC)1 +5 VDC and -5 VDC ± 10% @ 150uaDC or For other power options consult factory.

¹ For the 9 Volt DPM the input must either be fully isolated from the power source, or, if referenced to the source, the IN LO terminal must be no closer than 2.3V for the 200mV range (3.5V for the 2V range) to either battery terminal.

sales@jewellinstruments.com • www.jewellinstruments.com • 800 638-3771 850 Perimeter Road • Manchester, NH 03103 • USA



1000 Series Set Point Drawing(mm/in)

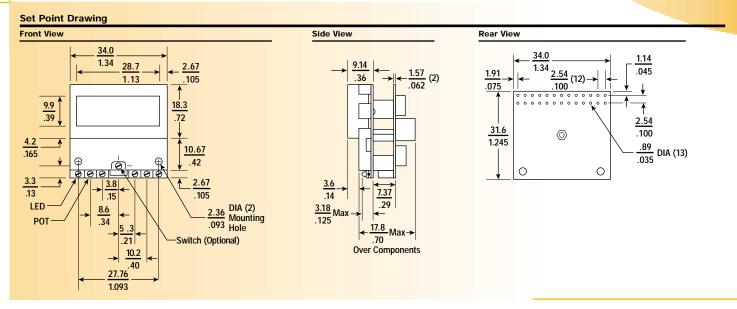

1000 Series Dimensional Drawings (mm/in)

